

Transporters
L-1 & L-2



HAPERT INDIGO
TRANSPORTERS



INDIGO L: DURABLE SUBSTRUCTURE: PRACTICAL AND VERSATILE

The Indigo L is available as either a single-axle version or a twin axle. As a standard, it has a robust, fully welded and galvanised substructure. The Combi Protect Rail on the sides and front is standard as well.

The basic model can be used for many different purposes. It will even carry a generator or other types of machinery. Various optional packages are available, including an MT-1 or MT-2 (Motorcycle Transport - this is a package with one or more special, multi-adjustable motorcycle brackets). For transportation of cars, the AT (Auto Transport) package is also available. It has 2 aluminium loading skids, allowing you to easily transport your car. This Indigo L is ideal for both commercial and private use!

**BRING
IT ON.**



L-1




L-2

STANDARDS, OPTIONS, AND ACCESSORIES



Standard: U profile at the rear for the mounting of one or more loading skids.



Standard: fixed Combi Protect Rail (with a height of 80 mm) on the front and sides. The adjustable motorcycle support is an option.



Standard: rear lights are integrated in the light girder.



Standard: the braked models have been provided with a screwed on V-drawbar and a foldable jockey wheel. The unbraked models have a screwed-on tube drawbar and a light-weight jockey wheel.



Standard: the mudguards have been closed on the inside. Provided with TÜV-certified binding brackets, integrated in the side rail, with a capacity of 1000 daN each.



Standard: 4 mudguard supports to mount the mudguards.



Standard: Indigo L-1 is available as an unbraked version in 750 kg or a braked version in 1350, 1500 or 1800 kg.



Standard: Indigo L-1 is available:
- with a length of 200, 250, and 300 cm.
- with a width of 110, 130, 150, and 180 cm.



Standard: Indigo L-2 is available as:
- braked version in 2000, 2700, 3000, and 3500 kg.
- with a length of 250 and 300 cm.
- with a width of 130, 150, and 180 cm.



Option: load-restraint tubing mounted.



Option: Auto Transport package, comprising:
- 2 stable, aluminium loading skids mounted on the floor.



Option: Motorcycle Transport 2 package, comprising:
- 1 stable, aluminium loading skid mounted on the floor.
- 2 adjustable motorcycle supports.



Option: Motorcycle Transport 2 package mounted.



Option: winch and winch support mounted in front (only possible on braked versions).




Option: Motorcycle Transport 1 package mounted.



Option: Motorcycle Transport 1 package, comprising:
- 1 stable, aluminium loading skid mounted on the floor.
- 1 adjustable motorcycle support.



All Hapert trailers have been provided with the TÜV certified load-securing system!

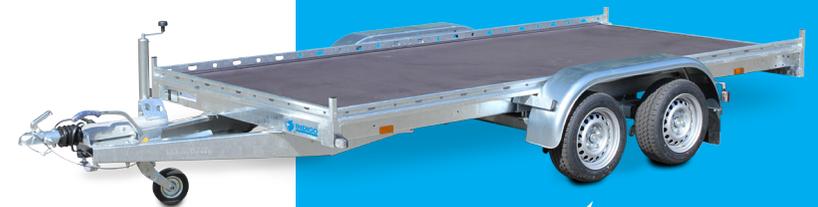

WWW.HAPERT.COM